






Dione




LED		230 V 50 Hz	EVG 
IP 20	IP 54	CRI 80	80000 L80B50
	SDCM 3	EVG DIMM 	

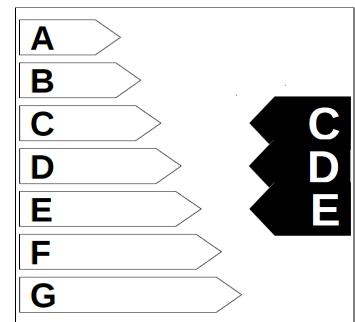


Body:
White painted (RAL 9003) metal sheet

Optic:
Translucent acrylic layer with a cover
KN - microprismatic cover
KO - opal cover


Application:
Recessed installation into gypsum or raster ceiling

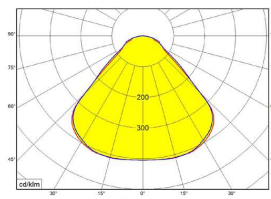

Dione KN

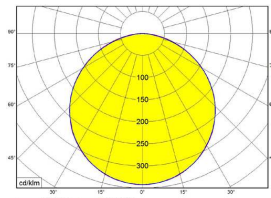

Dione KO

	lm		W	Ø	C		kg
	KO	KN					
Dione 1000 190	970	1050	9	210	46	190	0,9
Dione 1500 190	1350	1450	13				
Dione 2000 190	1800	1950	19	390	46	370	2,0
Dione 3000 370	2800	3000	26				
Dione 4000 370	3550	3800	34				

lm - luminous flux of light fitting

Fixing clip

Body

Cover detail

