





# Atlas



|   |   |                |                              |
|---|---|----------------|------------------------------|
|  |  | <b>LED</b>     | <b>230 V</b><br><b>50 Hz</b> |
| <b>IP 65</b>  | <b>SDCM 3</b>   | <b>EVG</b>     | <b>CRI 80</b>                |
| <b>80000</b><br><b>L80B50</b>   |  | <b>CRI 90+</b> |                              |



**Body:**

White painted (RAL9016) galvanized metal sheet

**Optic:**

- KO – opal PS cover
- KN – microprismatic PS cover
- HO – smooth opal PS cover
- PCO – opal PC cover

**LED:**

- Mid Power LED
- CRI 80 (CRI 90 – see table below)
- 2... 2700K
- 3... 3000K
- 4... 4000K
- 5... 5700K
- 6... 6500K

**Wiring:**

- LED current driver
- ND – not dimmable (standard)
- DALI – dimmable DALI

**Versions:**

600/625 – for 600/625 module

**Application:**

Recessed – lighting for installation into false ceiling with visible supporting structure (both 600×600 or 625×625 modules

Using accessories LABRAM a fitting can be also installed as surfaced

Installation into a gypsum plasterboard ceiling can be done with a QVESTRAM frame


The fixture can not be open – emergency module no available

**Accessories:**


QVESTRAM – a frame for recessed installation into gypsum plasterboard ceiling

LABRAM – a frame for surface installation

On request: special antibacterial layer



ATLAS A KO



ATLAS A KN

Body


Connector

Connection



Codes: ATLAS4000A3KOND

| ATLAS   | 4000 | A | 3 | KO | 600 | ND |
|---|------|---|---|----|-----|----|
| Luminaire type  |      |   |   |    |     |    |
| Light output  |      |   |   |    |     |    |
| Body shape:<br>A – square - 600x600 mm<br>C – rectangle - 300x1200 mm               |      |   |   |    |     |    |
| Color temperature:<br>2 = 2700K<br>3 = 3000K<br>4 = 4000K<br>5 = 5700K<br>6 = 6500K |      |   |   |    |     |    |
| Cover type<br>KN – microprizma PS<br>KO – opal PS<br>PCO – opal PC                  |      |   |   |    |     |    |
| Modul   |      |   |   |    |     |    |
| Driver type:<br>ND – no dimmable<br>DALI – dimmable DALI                            |      |   |   |    |     |    |

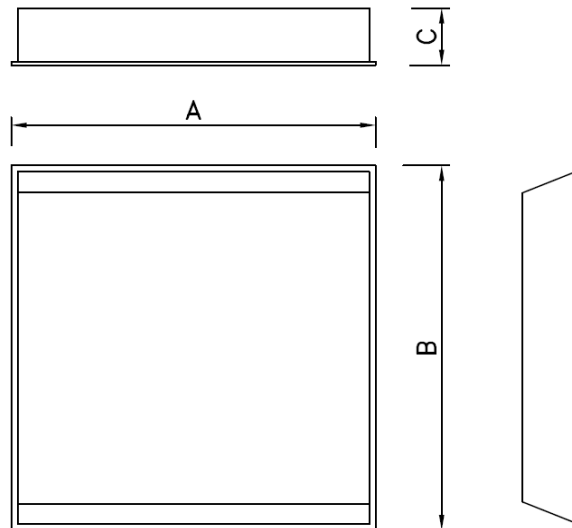

|              | W  | lm (KO/KN) | lm/W (KO/KN) | lm (CRI90) (KO/KN) | °C     | 600  |     | 625  |     | C  | kg |
|--------------|----|------------|--------------|--------------------|--------|------|-----|------|-----|----|----|
|              |    |            |              |                    |        | A    | B   | A    | B   |    |    |
| ATLAS3000A&# | 23 | 3100/3200  | 135/139      | X                  | -10+35 | 596  | 596 | 622  | 622 | 85 | 5  |
| ATLAS4000A&# | 32 | 4100/4200  | 128/131      | 3400/3500          | -10+35 | 596  | 596 | 622  | 622 | 85 | 5  |
| ATLAS5000A&# | 42 | 5200/5400  | 124/129      | X                  | -10+35 | 596  | 596 | 622  | 622 | 85 | 5  |
| ATLAS6000A&# | 55 | 6500/6900  | 118/125      | 5300/5700          | -10+35 | 596  | 596 | 622  | 622 | 85 | 5  |
| ATLAS4000C&# | 32 | 4000/4200  | 125/131      | X                  | -10+35 | 1196 | 296 | 1245 | 310 | 85 | 5  |
| ATLAS6000C&# | 57 | 6200/6500  | 109/114      | X                  | -10+35 | 1196 | 296 | 1245 | 310 | 85 | 5  |

& - 3=3000K, 4 = 4000K etc., Im – luminaire light output # - cover KO or KN