





Crux



CRUX 2000KO

Body:
White painted (RAL 9003) metal sheet
Optic:
KO – opal PS cover
LED:
Mid Power LED
3...warm white 3000K
4...cold white 4000K
Wiring:
LED current driver
ND – not dimmable (standard)
DALI – dimmable DALI
Application:
Recessed installation into gypsum or raster ceiling

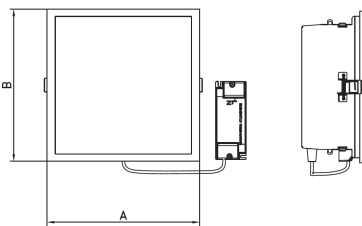

	W	lm	A	B	C		kg
Crux 1000	10	1000	224	224	90	210×210	0,7
Crux 2000	19	2000	224	224	90	210×210	0,7

lm – luminaire light output

Fixing clip

Connection

Driver

Cover detail

