




Diadem

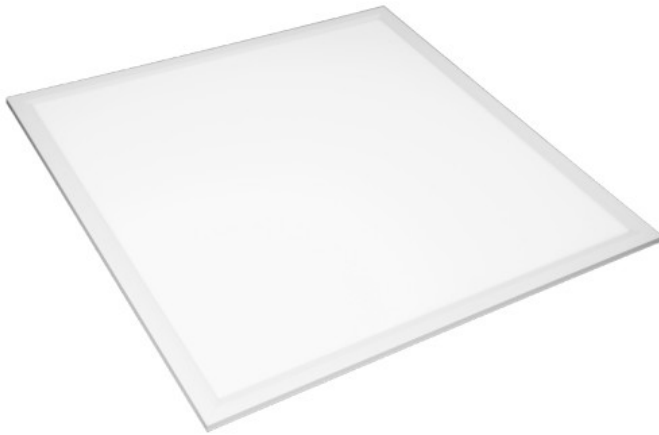

Body:

White painted (RAL 9003) metal sheet

Optic:

Translucent acrylic layer + Micro- prizma cover

LED:

4...cold white 4000K

Wiring:

LED current driver

ND – not dimmable (standard)

DIM – dimmable 1 -10V DC

DALI – dimmable DALI

Version (body shape)

DIADEM..A – square 600x600 mm


DIADEM..C – rectangle 1200x300 mm

Installation way:


DIADEM - insulation class II, for recessed installation into a raster ceiling 600x600mm or 625x625mm. Using accessories the panels can be also installed as surfaced or recessed into gypsum plasterboard.

Accessories:

S/M FRAME – a frame for surface installation R/M FRAME –a frame for recessed installation of US into gypsum plasterboard ceiling

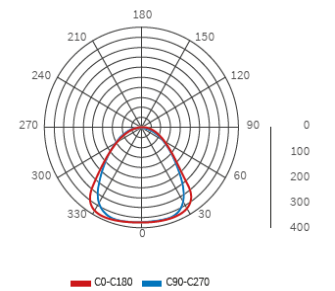

DIADEM

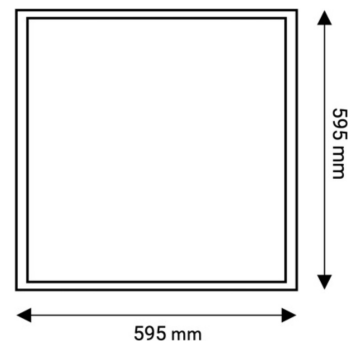

	W	K	lm	lm/W
DIADEM 34	34	4000	4080	120
DIADEM 45	45	4000	4500	100

Driver's connector

N-prism + ramka n/t

Backplate

