
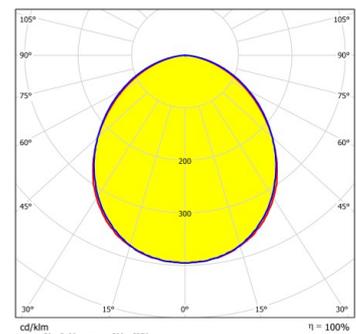


# Electra



ELECTRA-LED-OP-5000-236

**Body:**

white painted metal sheet RAL 9003

**Optic:**

tempered safety glass (SG) or matt tempered safety glass (OP)  
reflector made of white painted metal sheet

**Wiring:**

universal LED driver: 220-240 V 50-60 Hz; 220-240 V DC  
LED sources 4000K

**Application:**


workshops, cellars, garages, kitchens and production halls  
these light fittings can be used as surface, wall mounted or suspended

**On request (#):**

MULTIELECTRA – with maintained emergency source (Aw 1h; Aw 3h)  
ELECTRA-Em – with non-maintained emergency source (Em 1h; Em 3h)  
1F/3F – one or three phase through-wiring connection  
2700K-6500K – another color temperature  
NANO – protection by means of special NANO layers (hydrophobic oilphobic, antibacterial protection)  
NEREZ – body from stainless steel metal sheet

**Accessories:**

008501 Sealing plug M20  
051139 Set of ceiling stainless steel bracket ELECTRA (2 pcs)  
051145 Pole bracket ELECTRA stainless steel (Ø50mm)  
008029 Cable gland PG 13,5 with nut HEAVY DUTY RAL 7004

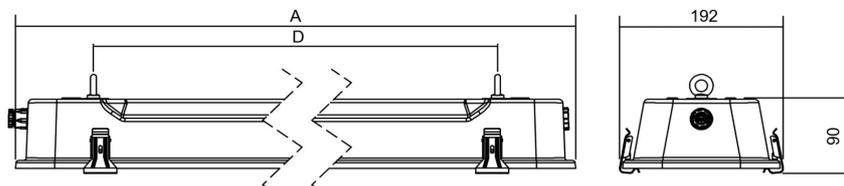

	W	lm (SG/OP)	ta [°C]	A	D	kg
ELECTRA-2500-218-4K	16	2120/2079	-20 – +45	705	510	3,8
ELECTRA-5000-218-4K	33	4166/4362	-20 – +45	705	510	3,9
ELECTRA-5000-236-4K	33	4336/4254	-20 – +60	1305	1110	7,1
ELECTRA-10000-236-4K	66	8333/8724	-20 – +45	1305	1110	7
ELECTRA-7500-258-4K	50	6504/6381	-20 – +45	1305	1410	8,1
ELECTRA-12250-258-4K	80	10429/10918	-20 – +40	1605	1410	8,3

note: Aw and Em versions are suitable for work in conditions ta 0°C – +40 °C