








Hydra



			LED
230 V 50 Hz	SDCM 3	EVG 	IP 20
CRI 80	80 000 L80B50	EVG DIMM 	



HYDRA

Body:

White painted metal sheet

Optic:

AS – white painted asymmetric reflector

LED:

Mid Power LED

CRI 80 (CRI 90 on request)

3...warm white 3000K

4...cold white 4000K

replaceable light source

Wiring:

LED current driver

ND – not dimmable (standard)

DALI – dimmable DALI

Application:

Surface or pendant installation

Recessed installation into raster 600

These LED fittings are recommended for school classrooms, shops, and for illumination of other vertical areas.

Accessories:

ZH/UNI2 – universal 2-wires suspension



Hydra

LED modul

Backplate



HYDRA	P	4000	M	3	/ND
Luminaire type	Assembly: P – surfaced, pendant R – recessed	Light output	Body lenght: S = 600 mm M = 1200 mm L = 1500 mm	Color temperature: 3 = 3000K 4 = 4000K	Driver type: ND – no dimmable DALI – dimmable DALI

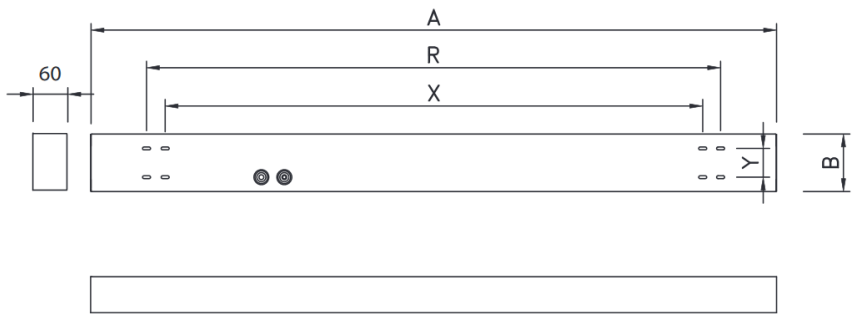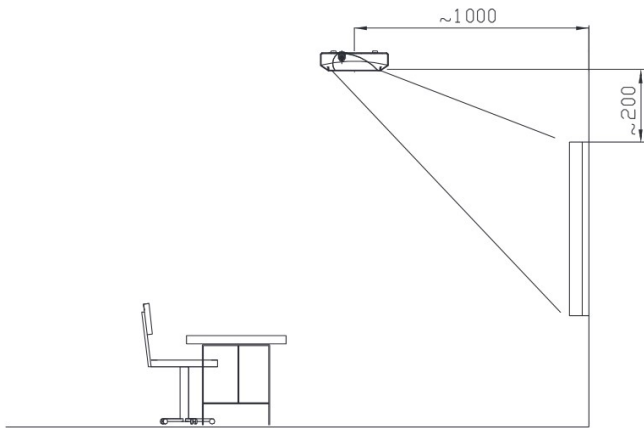

	W	lm	A	B	C	X	Y	R	kg
HYDRA2000S&	16	2000	59	100	60	460	50	500	1,8
HYDRA3000M&	25	3200	1195	100	60	1000	50	1100	3
HYDRA4000M&	35	4500	1195	100	60	1000	50	1100	3
HYDRA3000L&	23	3100	1486	100	67	1000	50	1100	3,9
HYDRA6000L&	47	6200	1486	100	67	1000	50	1100	3,9

& - 3 = 3000K, 4 = 4000K lm – luminaire light output

Due to program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to +/- 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.