







Mizar



	LED	230 V 50 Hz	
CRI 70	100000 L70B50	EVG 	IP 65
EVG DIMM 			



MIZAR9000

Body:
Polyester powder painted non-corrosive high-pressure die-cast aluminium

Optic:
Asymetric glare-free optic lens
Tempered 4mm flat glass

LED:
High power LED
standard – daylight 4000K
optional – 3000K or 5000K

Wiring:
ND – not dimmable (standard)
3DIM – dimmable driver OSRAM 4DIM

Application:
Multi-purpose exterior fitting for roads, streets, park lots, potholes and others applications
Mounting module is fixed to any post top or side entry spigot 42-60 mm
Adjusting angle -30° do +90°
Optimal for 6-14 m posts




Accessories:
PR42/60 – flange reduction 42 mm / 60 mm
245039902 – wall holder

Adjustable flange




Adjustable flange

Wall holder

Connection

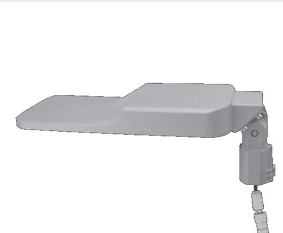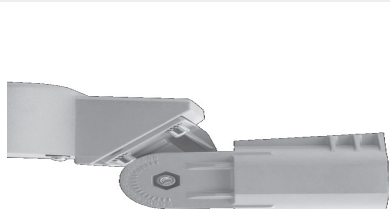

Mizar	5000	V1	5	/3DIM
Luminaire type				
	Light output			
		Used LEDs		
			Color temperature: 1 = 2200K 2 = 2700K 3 = 3000K 4 = 4000K 5 = 5000K	
				Driver type: ND – no dimmable 3DIM – dimmable DALI/STEPDIM/ASTRODIM

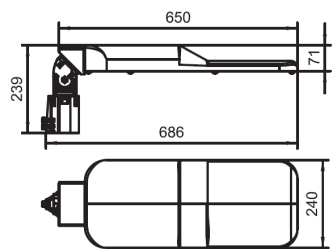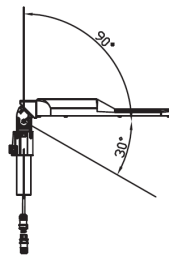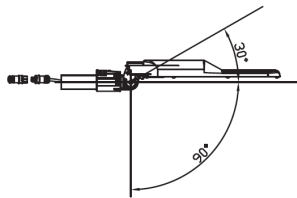

	W	lm 2200K	lm 2700K	lm 3000K	lm 4000K	lm 5000K	kg
Mizar 3500 ND	28	2000	3070	3100	3160	3200	8
Mizar 3500 3DIM	30	2700	3740	3780	3860	3900	
Mizar 5000 ND	38	3500	4800	4850	4950	5000	
Mizar 5000 3DIM	47	3900	5470	5530	5650	5700	
Mizar 7500 3DIM	56	5300	7400	7470	7600	7700	
Mizar 9000 3DIM	87	7750	10750	10860	11080	11200	
Mizar 11500 3DIM	103	9100	12600	12800	13100	13200	
Mizar 14000 3DIM	144	11500	15850	16200	16550	16700	

lm – luminaire light output