


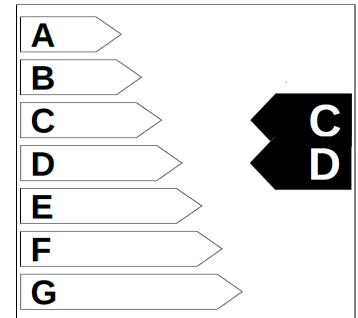


Orion Solo



LED	230 V 50 Hz	CRI 80	
80000 L80B50	EVG 	IP 20	EVG DIMM 



Body:

Eloxal aluminium profile

Optic:

Linear plastic optics

CN – narrow 60°

CW – wide 90°

CHR – high rack 35°

CRA – retail asymmetric

KO – opal cover

KN – prismatic cover

LED:

Mid Power LED

CRI 80

2700K

3000K

4000K (standard)

5700K

6500K

Wiring:


LED constant current driver

ND – not dimmable (standard)


DALI – dimmable DALI

Application:


- pendant (Orion) or surfaced (OrionP) installation of single fittings
- suspension set included (Orion)



Orion CN



Orion CW




Orion CHR


Orion

Switching terminal block

Hinge

Hinge

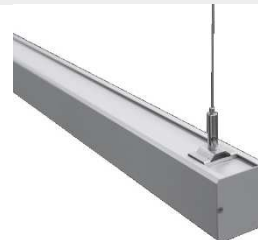

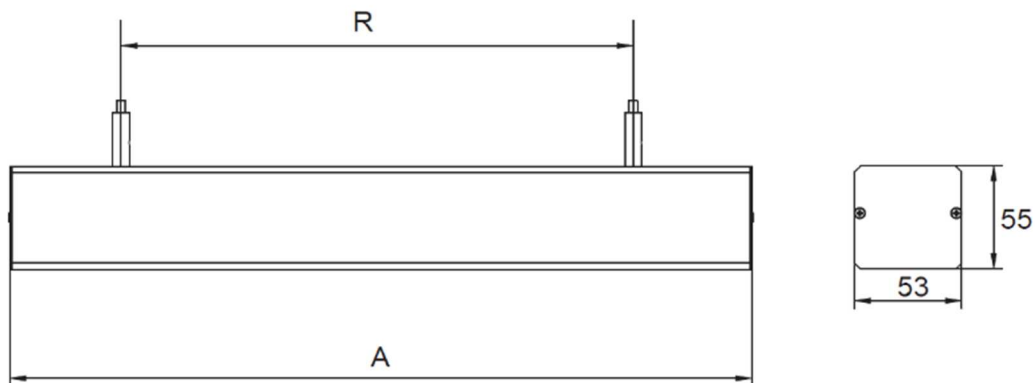

		lm						A	B	C	R	kg
		CW	CN	CHR	CRA	KN	KO					
Orion2000S	16	2 100	2 000	1 900	1 800	2 000	1 900	576	53	55	300-400	1,3
Orion3000XM	21	3 100	3 000	2 900	2 800	2 800	2 700	858			450-650	2,0
Orion4000M	30	4 200	3 900	3 800	3 600	3 700	3 500	1140			600-800	2,2
Orion4000L	22	3 500	3 200	3 100	2 900	2 900	2 800	1422			700-900	2,5
Orion6000L	39	5 600	5 200	5 000	4 700	4 900	4 600					
Orion8000L	57	7 700	7 200	7 000	6 500	6 700	6 300					

		lm						A	B	C	R	kg
		CW	CN	CHR	CRA	KN	KO					
OrionP2000S	16	2 100	2 000	1 900	1 800	2 000	1 900	576	53	60	520	1,2
OrionP3000XM	21	3 100	3 000	2 900	2 800	2 800	2 700	858			650	1,9
OrionP4000M	30	4 200	3 900	3 800	3 600	3 700	3 500	1140			900	2,1
OrionP4000L	22	3 500	3 200	3 100	2 900	2 900	2 800	1422			1200	2,4
OrionP6000L	39	5 600	5 200	5 000	4 700	4 900	4 600					
OrionP8000L	57	7 700	7 200	7 000	6 500	6 700	6 300					

lm - luminous flux of light fitting

Due to program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to +/- 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value.
The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.