









Superba PK



		LED	230 V 50 Hz
SDCM 3	IP 40	EVG 	CRI 80
	80000 L80B50	EVG DIMM 	CRI 90+



EPK KN



EPK KO

Body:

White painted (RAL 9003) metal sheet

Optic:

KO – opal PS cover

KN – microprismatic PS cover

LED:

Mid Power LED

CRI 80 (CRI 90 on request)

2... extra warm white 2700K

3... warm white 3000K

4... cold white 4000K

5... daylight 5700K

Wiring:

LED driver (constant current)

ND – not dimmable (standard)

DALI – digital dimmable DALI

Application:

Surface installation using magnetic holders (part of the package)

Pendant installation using suspension set (extra accessories)

ZH/UNI2 – fittings EPK RS

ZH/UNI4 – fittings EPK SS

Accessories:

ZH/UNI2 – universal 2-wires suspension



ZH/UNI4 – universal 4-wires suspension

MAGNETIC HOLDER

ZH/UNI2




OPAL COVER

DRIVER

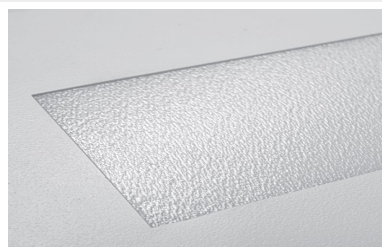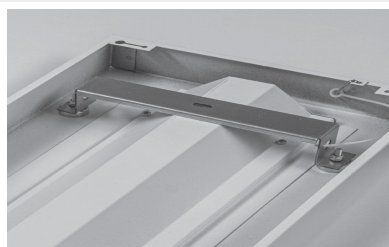

Codes: EPK4000RS3KN/1/ND

EPK	4000	R	S	3	KN	/1	/ND
Luminaire type							
Light output							
Body shape: R – rectangle S – square							
Body length: S = 600 mm M = 1200 mm L = 1500 mm							
Color temperature: 2 = 2700K 3 = 3000K 4 = 4000K 5 = 5700K							
Optic: KO – opal PS cover KN – microprismatic PS cover							
Nr of LED modules							
Driver type: ND – no dimmable DALI – dimmable DALI							

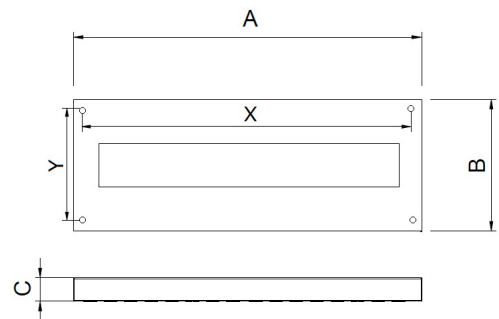

	W	lm (KO)	lm (KN)	A	B	C	X	Y	kg
Superba EPK2000 RS&/1	15	1850	1950	655	255	40	500	-	0,8
Superba EPK2000 SS&/1	15	1850	1950	595	595	40	500	500	2
Superba EPK3000 SS&/1	20	2500	2650	595	595	40	500	500	2
Superba EPK3000 SS&/2	19	2650	2800	595	595	40	500	500	2
Superba EPK4000 SS&/2	30	3900	4100	595	595	40	500	500	2
Superba EPK6000 SS&/2	48	5700	6000	595	595	40	500	500	2
Superba EPK4000 RM&/1	28	4000	4200	1230	225	40	1140	-	2
Superba EPK6000 RM&/1	51	5600	5900	1230	225	40	1140	-	2
Superba EPK4000 RL&/1	34	4200	4400	1535	225	40	1300	-	2,6
Superba EPK6000 RL&/1	46	5500	5800	1535	225	40	1300	-	2,6

& - 2 = 2700K, 3 = 3000K, 4 = 4000K, 5=5700K

lm – strumień świetlny z oprawy / luminaire light output # - wyp. elektryczne / wiring

Due to program of products development a data can be changed without notice. Luminous flux and connected electrical load are subject to an initial tolerance of up to +/- 10%. Color temperature is subject to a tolerance of up to +/-150 K from the nominal value. The failure of 1 LED points causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.